




PO Box 736 • Stevenson, CT 06491
 www.oxfordtechusa.com
 Phone: (203) 268-6030
 Fax: (203) 445-1240
 info@oxfordtechusa.com

Oxford Lift System®

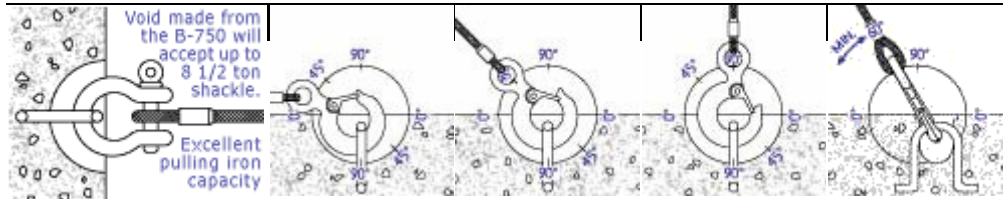

Anchor Product Code	Slab Min. Inches	Safe Working Load @ 90 degree Shear-0 degree Pull	Safe Working Load @ 90 degree Shear-45 degree Pull	Safe Working Load @ 90 degree Tension-90 degree Pull	Safe Working Load @ 90 degree Shear-60 degree Pull
A 500-3	4.00"	4,500	4,000	3,500	4,000
A 500-4	5.00"	8,000	5,500	4,000	5,000
A 500-5	6.00"	10,500	6,500	5,000	5,500
A 750-5	6.00"	12,500	8,000	7,000	7,000
A 750-7	8.00"	15,000	12,500	10,000	10,000

Note: Safe Working Load provides a factor of safety of approximately 4:1

Test Results are based on a minimum concrete compressive strength of 4,000 psi.

[<back](#)
[next>](#)

Home	B-500 & B-750	S-150	S-300	Lift Anchor & Order Form	Concrete Products
Pull Iron Capacity	Anchor & Accessories	Toggle-Lok	Insert/Lift Anchor	Grid-Lok/Rebar Chair	Helpful Calculations COMING SOON!